



Technical Datasheet for Mahniroo Alternators DSG43 M1-4

Generator data

Generator :	DSG43 M1-4	poles:	4	Standard:	IEC60034	
Rated power :	150 KVA	Rated Current:	217 A	Rated Voltage:	230 V	
Active Power :	120 Kwatt	Reactive Power:	90 kvar	Power Factor:	0.8	
Speed:	1500 rpm	Freq:	50 HZ	Mech Power:	132 kwatt	
Voltage range/ferquency range :		Zone A according IEC 60034-1 (dU=+/-5%,df=+/-2%)				
Insulation class	stator: Class H	Rotor: Class H	Temperature Rise:	H		
Winding Pitch:	2/3					
Ambient Temperature :	40°C	Site altitude :	1000 m	Enclosure: IP23		
Enviroment: Standard Enviroment						
Cooling:	1C 01-Open-circuit ventilation	Cooling Air Vol:	35 m ³ /min			
Weight:	540 Kg	Momment of Inertia:	1.8 Kg/m ²			
Temperature Air inlet	40°C	Cooling Water Quantity:	n/a			
Losses(enviroment):	13 Kwatt	Losses(cooling):	n/a			
Wires:	4 terminals, starpoint connected in terminal box			[Single	yes
Voltage regulator:	Cosimat C /MN	Operation mode	Parallel		yes	

Electrical Data (aac,IEC)




Efficiencies	110%	100%	75%	50%	25%
P.F 0.8	90.3	90.9	92	90	89.6
P.F 1.0	93.6	94.2	94.4	93.9	90.7

Reactances (p.u.) and time constants (second)

$X_d^{saturated}$	2.37	$X_q^{saturated}$	1.1	T_{d0}'	1.01 s
$X_{d'}^{saturated}$	0.222	$X_{q''}^{saturated}$	0.169	$T_{d'}$	0.096 s
$X_{d''}^{saturated}$	0.136	$X_0^{saturated}$	0.06	$T_{d''}$	0.0075 s
$X_2^{saturated}$	0.152			T_a	0.0144 s
$X_{1s}^{saturated}$	n.a.			$T_{q'}$	0.0096 s




Technical Datasheet for Mahniroo Alternators DSG43 M1-4

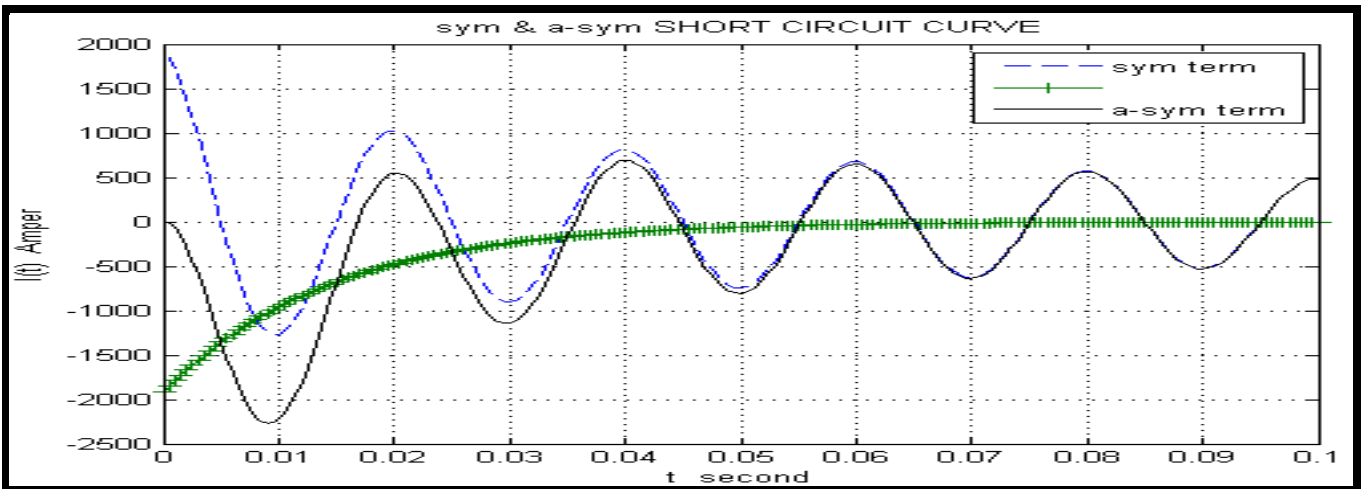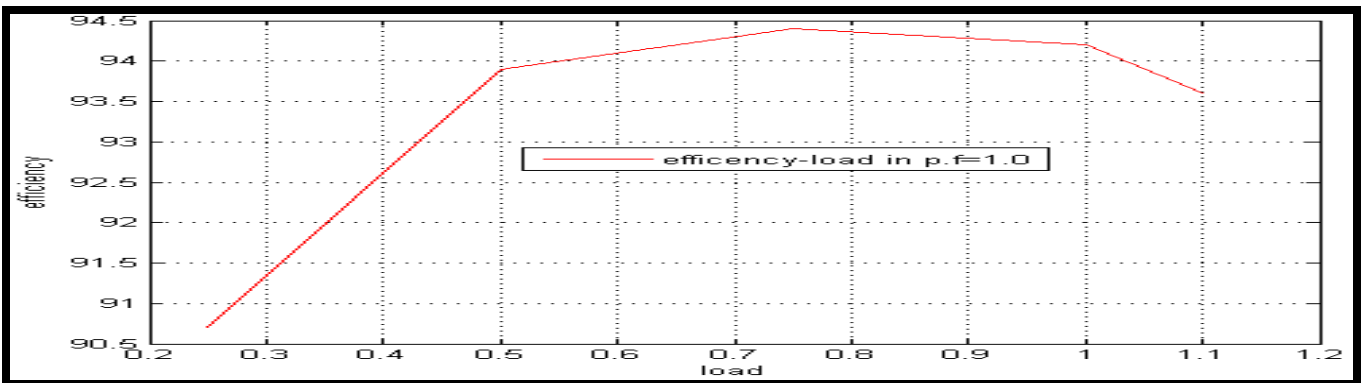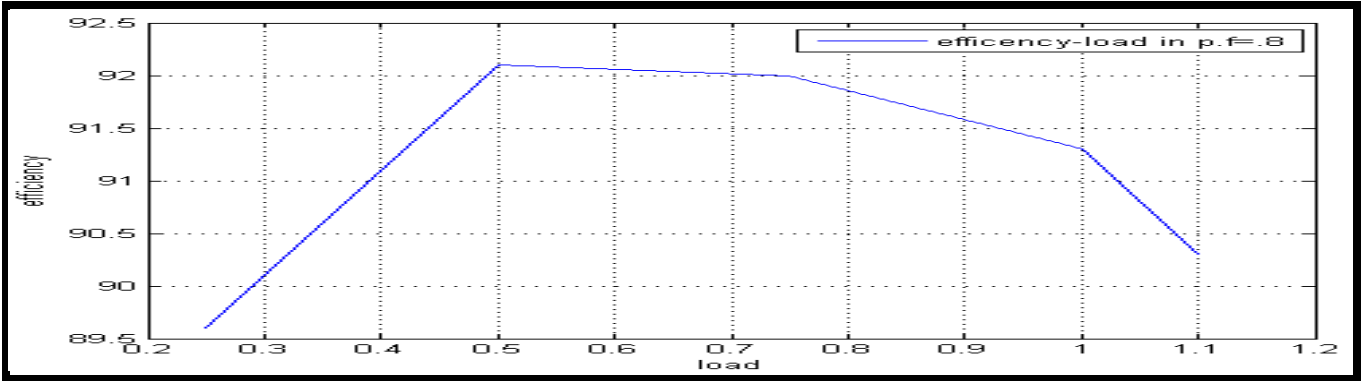



General Arrangement for Mahniroo
Alternators DSG43 M1-4

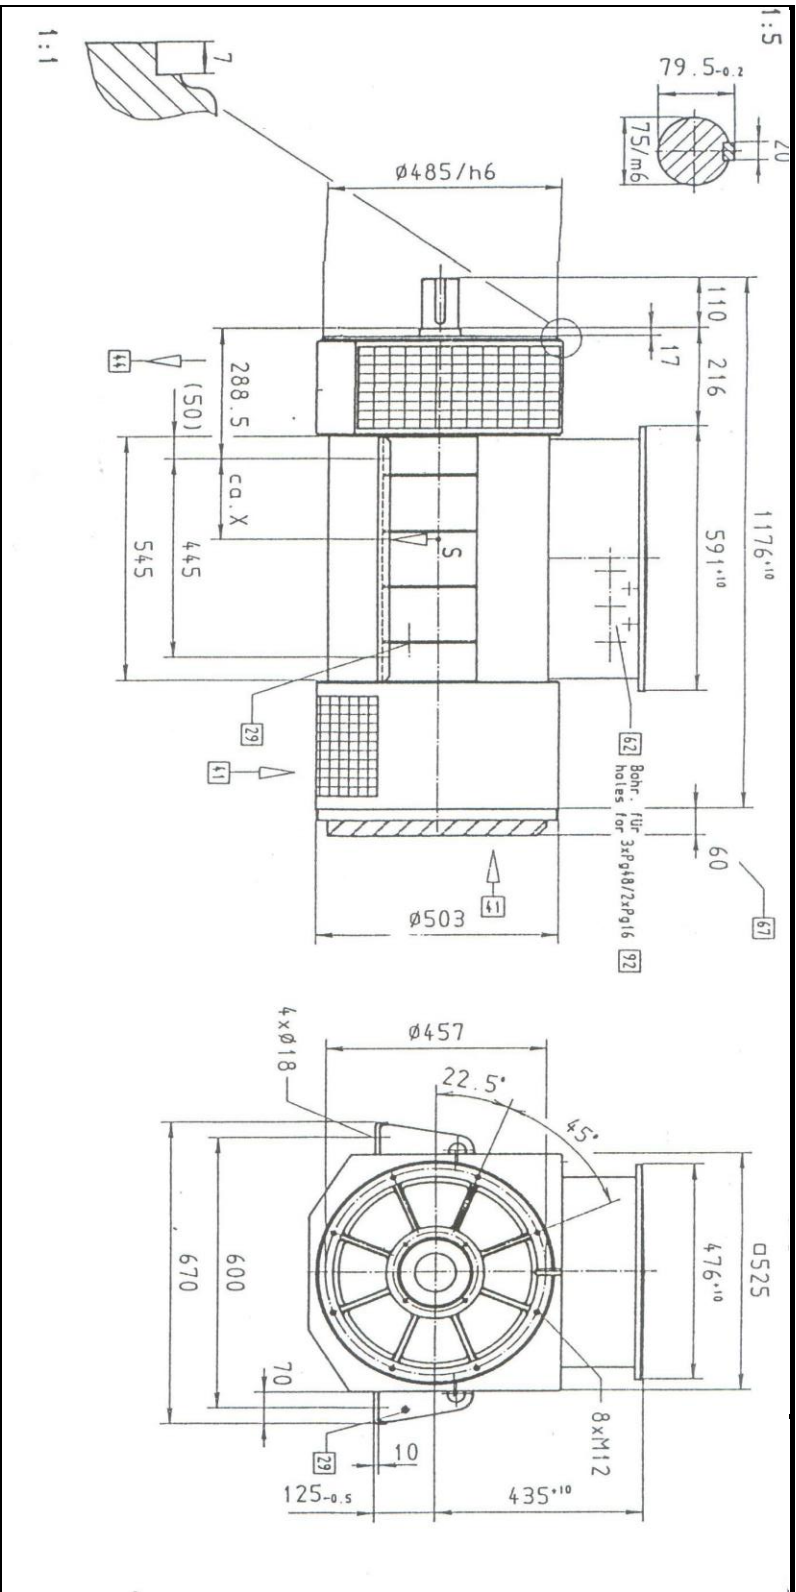

Printed in Iran ©
Avk/IMN 2016

No.12, Tara Building, Malek-o-Shoara Ave. Taleghani Ave, Tehran, Iran

Tel : +98 21 88 14 10 33 Fax : +98 21 88 14 10 31
Website : www.mahnirooco.com