

4000 Series


Diesel Engine –
Electro Unit

4016TAG2 4016TAG2A

1540 kWm 1200 rev/min
1886 kWm 1500 rev/min

The Perkins 4000 Series family of 6, 8, 12 and 16 cylinder diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability.

The 4016TAG2/2A are turbocharged, air to air charge cooled, 16 cylinder vee form diesel engines. Their premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market. The 4016TAG2A is specially tuned for improved load acceptance response in standby duty.

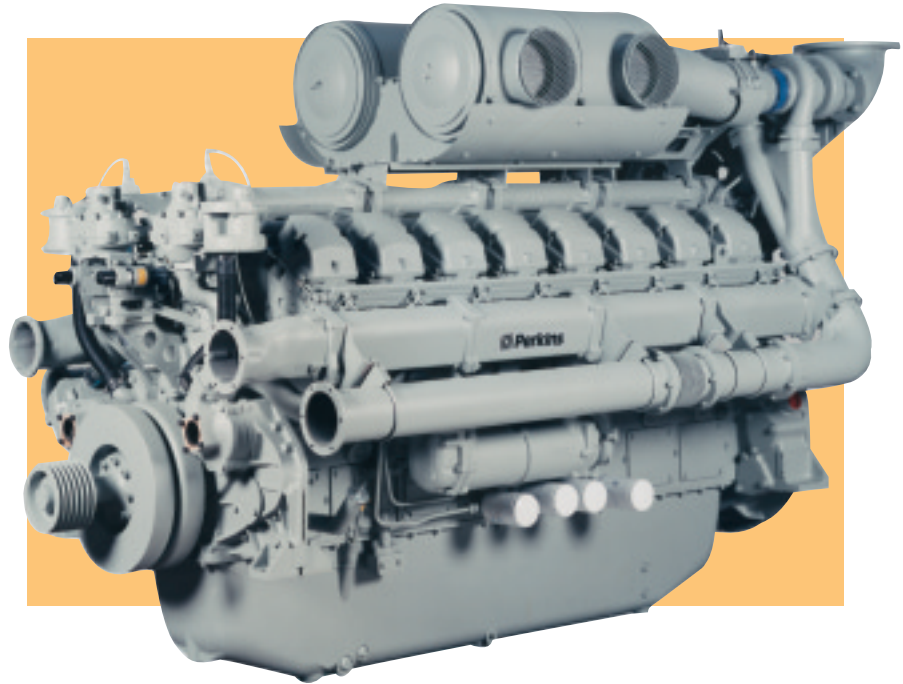

Economic power

- Individual 4 valve cylinder heads giving optimised gas flows.
- Unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion.
- Commonality of components with other engines in 4000 Series family for reduced stocking levels.

Reliable power

- Developed and tested using latest engineering techniques.
- Piston temperatures controlled by an advanced gallery jet cooling system.
- Tolerant of a wide range of temperatures without derate.
- Over 4000 distributors and dealers worldwide.

Clean, efficient power

- Exceptional power to weight ratio and compact size for easier transportation and installation.
- Designed to provide excellent service access for ease of maintenance.
- Engines designed to comply with major international standards.
- Low gaseous emissions.

Engine Speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
		kVA	kWe	Gross		Net	
				kWm	bhp	kWm	bhp
1200 *	Continuous baseload	1329	1063	1166	1564	1108	1485
	Prime power	1680	1344	1458	1954	1400	1877
	Standby (maximum)	1848	1478	1598	2142	1540	2065
1500	Continuous baseload *	1634	1307	1413	1894	1362	1826
	Prime power	2058	1646	1766	2367	1715	2300
	Standby (maximum)	2264	1811	1936	2596	1886	2529

* Note 4016TAG2A is offered for 1500 rev/min prime and standby duty only.

The above ratings represent the engine performance capabilities guaranteed within plus or minus 3% at the reference conditions equivalent to those specified in ISO 8528/1, ISO 3046/1, BS5514/1

Ratings conditions: 25°C air inlet temperature, barometric pressure 100 kPa, relative humidity 30%. Please consult your distributor or the factory for ratings in other ambient conditions.

Note: For full ratings please refer to Perkins Engines (Stafford) Limited. All electrical ratings are based on an average alternator efficiency and a power factor of 0.8.

Fuel specification: BS2869 Class A1 + A2 or ASTM D975 No 2D.

Rating Definitions

Continuous baseload – Power available for continuous full load operation. No overload is permitted.

Prime power – Power available for variable load with an average load factor not exceeding 80% of the prime power rating in any 24 hour period. Overload of 10% permitted for 1 hour in every 12 hours operation.

Standby maximum – Power available at variable load in the event of a main power network failure for a maximum of 500 hours per year. No overload is permitted.

4000 Series

4016TAG2 4016TAG2A

Standard Electro Unit Specification

Governing

- Electronic governor to ISO 3046 part 4 (BS5514/4) A1

Electrical equipment

- 24 volt electrical equipment comprising twin starter motors, battery charging alternator with integral voltage regulator and activating switch

Flywheel and housing

- SAE 18 flywheel, SAE 00 housing

Fuel system

- Direct fuel injection system, fuel lift pump, hand stop control

Lubrication system

- Lubricating oil filters
- Engine jacket water/oil temperature stabilizers

Cooling system

- Two twin thermostats, two water pumps
- Free end crankshaft pulley

Engine protection

- 24 volt stop solenoids (energised to run)
- Combined high coolant – temperature/low oil pressure switch
- Overspeed switch and magnetic pickup
- Induction air shut-off valves

Optional Equipment

The following optional extra equipment is available to make up the specifications to the Perkins

ElectropaK specification:

- Tropical radiator including:
Water pipes, clips and hoses
Fan, fan guards and belts

Other optional extra equipment available


- Twin heavy duty air cleaner – paper element with pre-cleaner
- Changeover lubricating oil filters
- Changeover fuel oil filters
- Immersion heater with thermostat
- Water pipes, clips and hoses for radiator
- Air starters
- Instrument panel

NB This list is not exhaustive, further options may be available to meet particular applications on enquiry to Perkins Stafford Sales Department

General Data

Number of cylinders	16	
Cylinder arrangement	60° Vee form	
Cycle	4-stroke	
Induction system	Turbocharged.	
	Air to air charge cooled	
Combustion system	Direct injection	
Cooling system	Water-cooled	
Displacement	61.123 litres	
Bore and stroke	160 mm x 190 mm	
Compression ratio	13.6:1	
Direction of rotation	Anti-clockwise, viewed from flywheel end	
Firing order	1A,1B,3A,3B,7A,7B,5A,5B 8A,8B,6A,6B,2A,2B,4A,4B	
Total lubrication system capacity	237.2 litres	
	Electro Unit	ElectropaK
Total coolant capacity	95 litres	315 litres
Total weight (dry)	5570 kg	8010 kg
Length	3265 mm	4460 mm
Width	1725 mm	2775 mm
Height	2115 mm	3239 mm

Fuel consumption g/kWh			
Engine speed	1200 rev/min	1500 rev/min	
	4016TAG2	4016TAG2	4016TAG2A
At standby maximum power rating	212	222	218
At prime power rating	208	217	215
At continuous baseload rating	207	213	–
At 75% of prime power rating	207	211	211
At 50% of prime power rating	215	216	215
At 25% of prime power rating	251	253	241

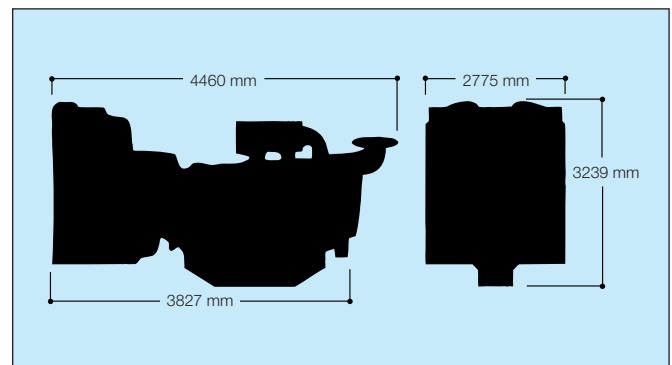

Perkins Group of Companies

Tixall Road Stafford ST16 3UB England
Telephone (01785) 223141 Telex 36156
Fax (01785) 215110
www.perkins-engines.com

All information given in this leaflet is correct at the time of printing, but it may be changed subsequently by the Company.

Distributed by